



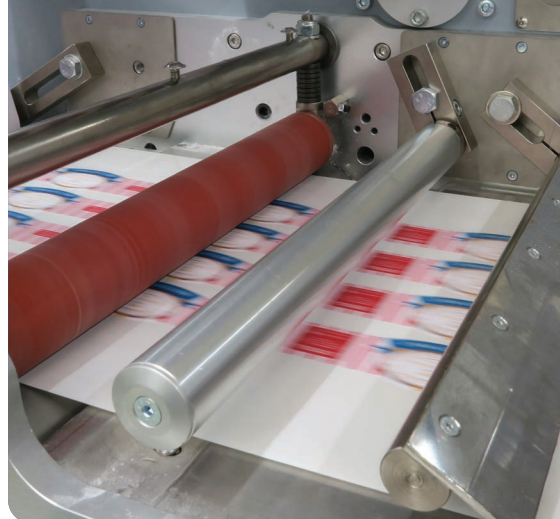

Smart and Simple Compressed Air Solution

MSS 4-75KW Screw Compressors
MDS 10-260 Refrigerant Dryers

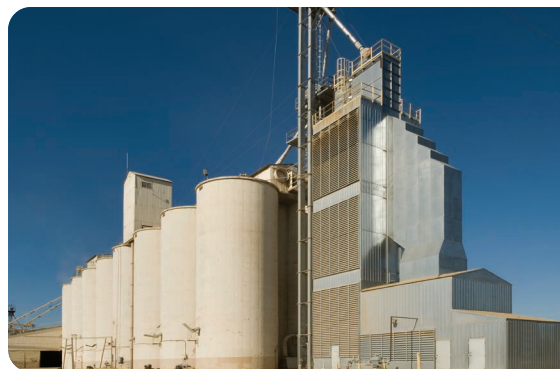

A collection of various size and model industrial power supplies from the brand 'COMET'. The units are shown in different sizes and configurations, including single-phase and three-phase models, and are arranged in a row. The units are light blue with black and red accents. The brand name 'COMET' is visible on the front of each unit. The units are arranged in a row, showing a variety of sizes and configurations. The units are light blue with black and red accents. The brand name 'COMET' is visible on the front of each unit. The units are arranged in a row, showing a variety of sizes and configurations. The units are light blue with black and red accents. The brand name 'COMET' is visible on the front of each unit.

Smart technical advantages

-
- This image shows the internal components of the generator unit. Three numbered callouts identify key parts: 1 points to the control panel and fuel system, 2 points to the engine block, and 3 points to the alternator and cooling fan assembly.

-

- » Smart slot design allows quick servicing
- » Easy cleaning with washing or air blowing

Model												
	Max. Pressure	Motor		Capacity			Noise	Weight	Connection	Dimension		
	Bar (G)	kW	HP	l/s	cfm	m³/min	dB±2	kg	G	Length (mm)	Width (mm)	Height (mm)
MSS 4 TM	10	4	5	9.04	19	0.51	68	200	½"	1540	751	1473
MSS 5.5 TM	10	5.5	7.5	11.4	24	0.65	68	230	½"	1540	751	1473
MSS 7.5	8	7.5	10	18	40	1.1	68	235	½"	650	650	890
	10	7.5	10	14	30	0.85						
MSS 11	8	11	15	27	60	1.6	70	235	¾"	650	850	930
	10	11	15	20	45	1.2						
MSS 15	8	15	20	34.5	75	2.0	70	235	¾"	650	850	930
	10	15	20	30.6	65	1.8						
MSS 18.5	8	18.5	25	51	110	3.0	70	345	1"	710	740	1275
	10	18.5	25	42	95	2.5						
MSS 22	8	22	30	58.1	125	3.3	70	350	1"	710	740	1275
	10	22	30	49	105	2.8						
MSS 30	7	30	40	86.1	185	4.9	75	500	1"	860	850	1345
	10	30	40	65.1	140	3.7						
MSS 37	7	37	50	94	205	5.6	75	530	1"	860	850	1345
	10	37	50	89	185	5.3						
MSS 45	7	45	60	116	250	6.96	75	650	1 ½"	1320	970	1380
	10	45	60	93	200	5.58						
MSS 55	7	55	75	150	320	8.60	78	875	2"	1574	1159	1718
	10	55	75	116	245	6.90						
MSS 75	7	75	100	205	425	11.90	79	1107	2"	1574	1159	1718
	10	75	100	161	340	9.61						

MDS REFRIGERANT AIR DRYERS

Mark is the largest air dryer manufacturer in the world with a 49-year legacy of serving various industries. Our dryers have a capacity starting from 0.36 kW. With an easy-to-operate on/off controller, 3-in-1 heat exchanger and a durable

refrigerant with environment-friendly gases, we guarantee energy efficiency and longer runtime. Mark air dryers have ISO 9001, ISO 14001 quality assurance.

Mark MDS refrigerated compressed air dryer

1. Refrigerant compressor

Driven by an electric motor, cooled using refrigerant fluid and protected against thermal overload

2. Refrigerant condenser

Air-cooled and with a large exchange surface for efficient thermal exchange

3. Motor-driven fan

For the condenser cooling air flow

4. Air/refrigerant evaporator

With high thermal exchange and low leakage

5. Condensate separator

High-efficiency separator for optimum performance

6. Air-air exchanger

With high thermal exchange and low load losses

7. On/off switch


Reliable simple on/off switch to turn on and off the dryer

8. Automatic discharge of condensate

User adjustable, timer solenoid drain, reliable and timely, proven design

9. Control panel

Indicates all relevant information

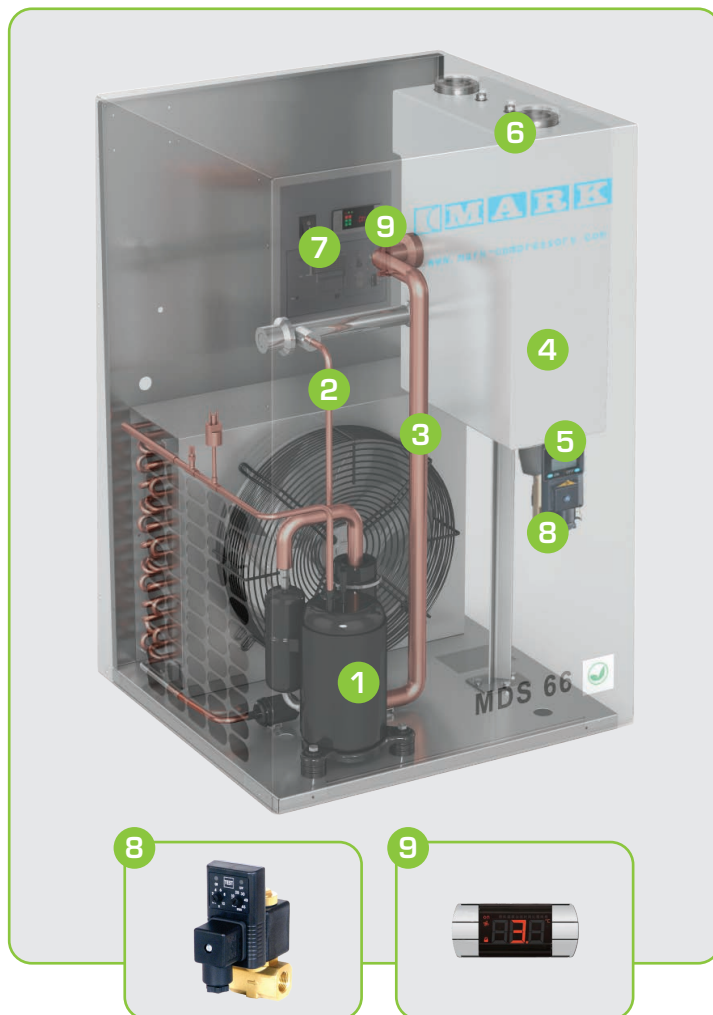

Model												Refrigerant
	Max. Pressure	Capacity			Motor	Electrical	Connection	Dimension			Weight	
	Bar (G)	I/S	cfm	m³/min	kW	V/Ph/Hz	G	Length (mm)	Width (mm)	Height (mm)	kg	
MDS 10	13	16.6	36.3	1.0	0.21	230/1/50	¾"	362	430	446	30	R134a
MDS 13	13	21.6	46.9	1.3	0.36	230/1/50	¾"	550	370	704	30	R134a
MDS 21	13	36.0	74.1	2.1	0.36	230/1/50	¾"	550	370	704	34	R134a
MDS 40	13	66.6	141.2	4.0	0.70	230/1/50	1"	520	500	809	55	R410A
MDS 66	13	110.0	233.0	6.6	0.96	230/1/50	1 ½"	520	500	809	60	R410A
MDS 85	13	141.6	300.2	8.5	0.98	230/1/50	1 ½"	550	600	958	68	R410A
MDS 105	13	176.0	370.8	10.5	1.00	230/1/50	2"	550	600	958	75	R410A
MDS 140	13	233.3	494.4	14.0	1.67	230/1/50	2"	900	750	1009	110	R410A
MDS 175	13	291.6	618.0	17.5	1.75	230/1/50	2"	900	750	1009	126	R410A
MDS 220	13	366.3	776.6	22.0	2.86	230/1/50	2 ½"	1050	660	1130	140	R410A
MDS 260	13	433.0	917.8	26.0	2.96	230/1/50	2 ½"	1050	660	1130	162	R410A

FULL FILTER RANGE

Allowing unclean or contaminated compressed air to enter your air network poses several risks. In almost all applications, this can cause a considerable decrease in performance as well as an increase in maintenance costs, both related to actual repairs as well as a loss in productivity. Mark's innovative filters are engineered to cost-effectively provide the best air quality and meet today's ever increasing quality demands. They are fully developed and tested according to ISO standards.

Components

- | | | |
|--------------------------------------|-----------------------------------|----------------------------|
| 1. High-efficiency glass fiber media | 4. Double O-ring leak free design | 7. Protection paper shield |
| 2. SS filter core for high strength | 5. Epoxy sealed caps | 8. Internal ribs support |
| 3. Oil & dust filter media | 6. Robust construction | |



UNPARALLELED EXPERTISE



Availability



Reliability



Partnership



Safety



Serviceability



Simplicity




Quality



More savings

Wide distributor
network with
factory-trained
service experts

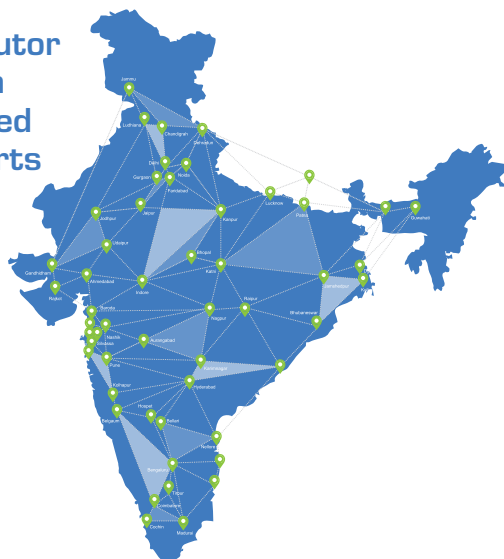

Care. Trust. Efficiency.

MARK

✉ info.india@mark-compressors.com

☎ Reach us at - 1800 120 110 050

🌐 www.markcompressors.in

Contact your local sales representative now!